


Turn on the 24V only when all cables are connected to the monitor.

Make sure the 12V/24V on the transmitter and 24V on the monitor are switchable on/off via the key-switch or other switch.

Do NOT connect the monitor on 12V!

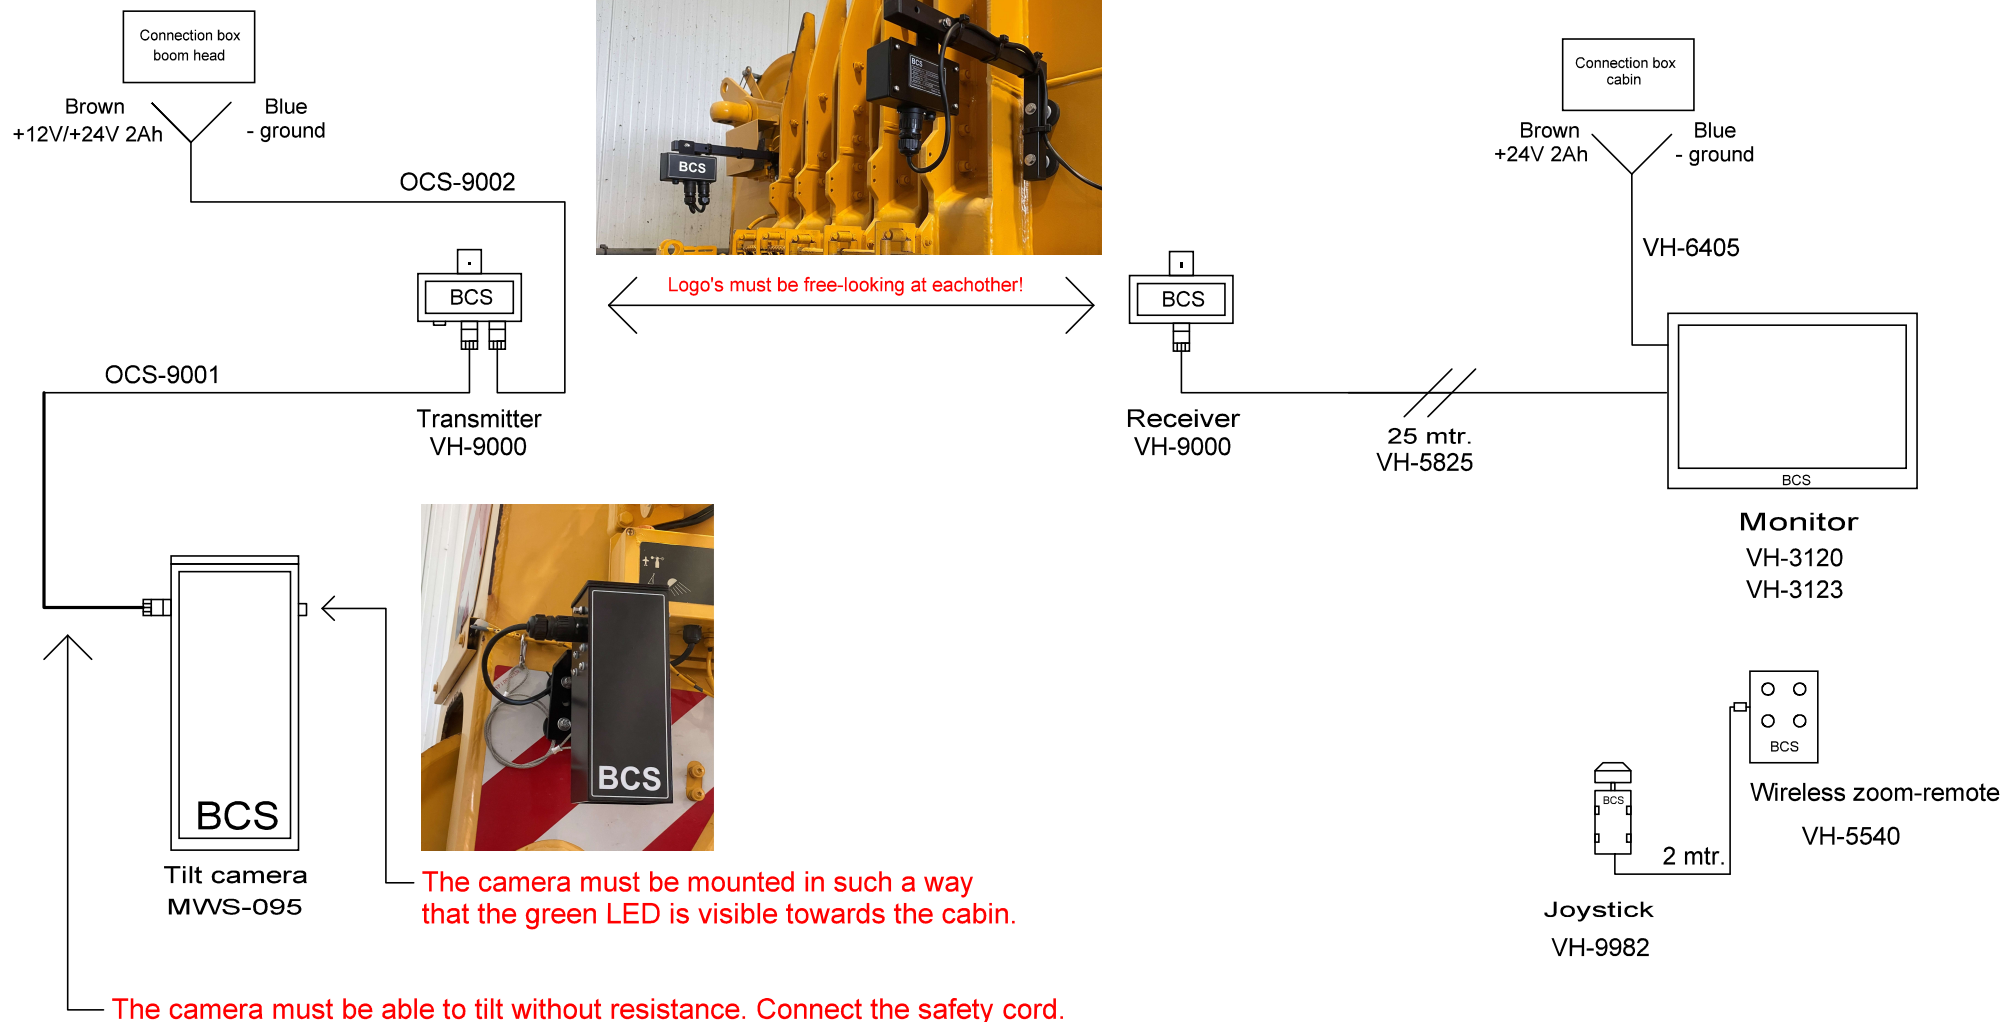

Installation diagram  
Wireless tilt-camera system  
VH-3810

BCS Cranecamera BV  
Kosmonaut 7  
3824MK Amersfoort (NL)